

ANALYSIS OF FOUNDATION SLIDING OF AN ARCH DAM CONSIDERING THE HYDROMECHANICAL BEHAVIOUR

Braga Farinha M.L.¹, Lemos J.V.², Maranha das Neves E.³

1, LNEC, Av. Brasil 101, 1700-066 Lisboa, Portugal, lbraga@lneec.pt

2, LNEC, Av. Brasil 101, 1700-066 Lisboa, Portugal, vlemos@lneec.pt

3, IST, Av. Rovisco Pais 1, 1049-001, Lisboa, Portugal, maranhadasneves@clix.pt

Abstract: This paper presents the application of a methodology which can be used to assess arch dam foundation stability, using the discrete element method (DEM) and the code 3DEC. A global three-dimensional model of a dam foundation was developed, in which some discontinuities were simulated and both the grout and drainage curtains were represented. The model, calibrated taking into account recorded data, was used to carry out non-linear mechanical analysis. The same model was employed to perform a hydraulic analysis, based on equivalent continuum concepts, which allowed the water pressure pattern within the foundation to be obtained. These water pressures were applied on discontinuities involved in the possible sliding mechanism along the dam/foundation interface, and the safety of the dam/foundation system was evaluated using a process of reduction of strength characteristics, with the aim of calculating the minimum safety factors that ensure stability. Results were compared with those obtained with the usual bi-linear uplift pressure distribution at the base of the dam, commonly used in concrete dam design. The relevance of carrying out hydraulic analysis in arch dam foundation failure studies is highlighted.

Key words: Concrete dams, Rock foundations, Hydromechanical behaviour; Failure analysis.

1 Introduction

In concrete dam foundations, failure mechanisms are typically defined by natural rock discontinuities, the dam/foundation interface or strata with lower strength. Instability may occur underneath the dam, in the abutments or in adjacent slopes. In the case of arch dam foundations, special attention must be given to failure scenarios associated with sliding along weaker surfaces in the dam foundation area where the arches rest, particularly in the valley sides and in the abutments, and to those involving seepage in the valley bottom, which leads to erosion of discontinuities.

Stability analysis for scenarios of foundation failure is often based on simplified limiting equilibrium procedures. More advanced analysis, however, is carried out with the DEM, which allows the discontinuous nature of rock to be properly simulated, and which may include fluid flow through the discontinuities. Stability studies using discontinuum models that take into account the coupling between hydraulic and mechanical effects have been applied mainly in two-dimensional (2D) analysis, for gravity dams [1, 2]. However, for arch dams 3D analysis is always required. In this case, fracture flow models become difficult to employ, but this can be overcome by performing stability evaluation applying suitable water pressures on potential sliding surfaces, calculated with a simple uncoupled flow analysis, in order to provide worst case scenarios [3]. Lemos and Antunes

used DEM to perform the safety analysis of two large Portuguese arch dams recently designed and currently under construction [4], assuming the usual bi-linear diagram of water pressures at the base of the dam and a simplified pressure field downstream from the dam, defined in terms of a water table compatible with the valley slopes.

This paper presents a study on mechanical behaviour and seepage in Alqueva arch dam foundation carried out with a view to evaluating dam stability. A global 3D numerical model of the dam and foundation was developed, with which it is possible to perform both mechanical and hydraulic analysis. The latter, based on equivalent continuum concepts, was done in order to obtain the water pressure pattern within the foundation, including pressures on discontinuities involved in possible sliding block mechanisms. These water pressures were afterwards applied in the 3D discontinuum mechanical model of the dam foundation, and the stability of the dam/foundation system was analysed for the failure scenario of sliding along the dam/foundation interface.

2 Alqueva arch dam

Alqueva dam (Figure 1) creates the largest artificial lake in Western Europe, with storage capacity of 4150 hm³ and a surface area of 250 km² at the retention water level. The dam is located on the River Guadiana, in the southeast of Portugal, and is the main structure of a multipurpose development designed for irrigation, energy production and water supply. It is a double curvature arch dam, with a maximum height of 96 m and a total length of 348 m between the abutments at the crest elevation (154 m). The dam width is 7 m at the crest, while at the base it varies from 30 m at the central cantilever to 33 m at the abutments. The powerhouse is located at the toe of the dam with a dam-wall downstream. In the valley bottom there is an impervious slab between the arch and the dam-wall (substation slab), and thus, in this area, the dam length in the upstream-downstream direction is 140 m.

The foundation consists of green schist of good quality on the right bank and the river bottom and of quite good phyllite on the left bank. The area of the phyllite is more fractured and is crossed by several faults, the most important being fault 22, along which the green schist/phyllite interface occurs. Various sets of subvertical and subhorizontal rock joints were identified at the dam site.



Figure 1. Downstream view of Alqueva dam

For foundation seepage control, grout and drainage curtains were installed from the foundation gallery of the dam and of the downstream dam-wall. To evaluate the efficiency of the relief system a network of piezometers was installed.

The first filling of the reservoir began in February 2002 and was concluded in January 2010.

3 Numerical analysis

3.1 Model

Numerical analysis of both concrete dam and rock mass was carried out with the code 3DEC [5], based on the discrete element model, which allows the analysis of the mechanical behaviour of both structures and media with discontinuity surfaces and of the hydraulic behaviour, assuming that flow takes place either through the discontinuities or through equivalent continuum media.

The failure scenario along the foundation joint was analysed based on the model shown in Figure 2, where discontinuities simulating the dam contraction joints, the dam/foundation interface (foundation joint), and two hypothetical joints between the grout curtain and the rock mass, at the upstream and downstream faces of the grout curtain, respectively (“grout curtain/rock interface”) were considered. These latter joints were introduced in order to simulate the opening of vertical fissures within the dam foundation close to the upstream face of the dam, caused by the existence of tensile stresses that usually develop within the rock mass below the heel of the dam, due to the filling of the reservoir. It was assumed that discontinuities may exhibit non-linear behaviour, (discontinuities’ constitutive model embodies the Mohr-Coulomb failure criterion, complemented with a tensile strength criterion), with failure caused by either tensile or shear stress, and that blocks of both the dam and the rock mass have a linear elastic behaviour. The model includes the location of fault 22, in order to simulate the area of lower modulus of elasticity, where the phyllite occurs. In this model neither the faults nor the rock joints within the rock mass were simulated, and thus the rock mass was assumed as a continuum medium.

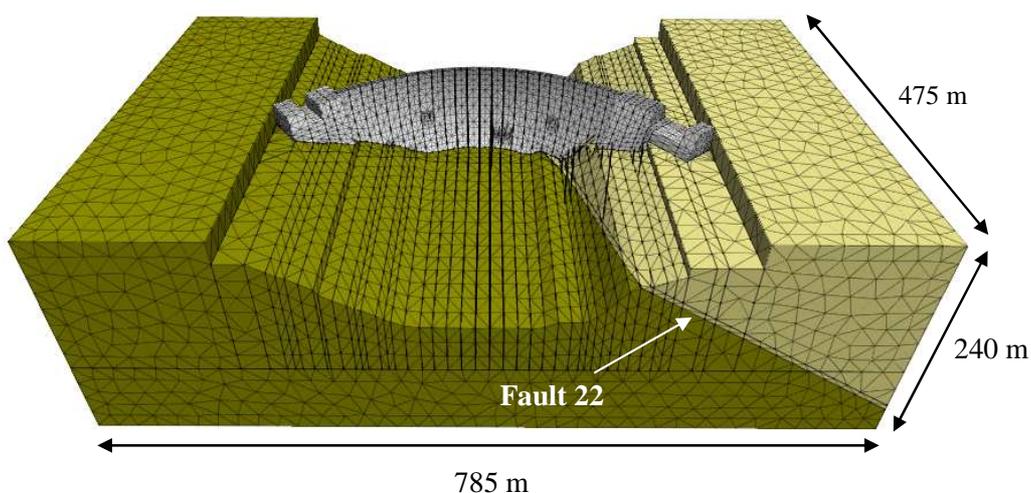


Figure 2. Geometry of the block system developed to analyse failure along the foundation joint and finite element mesh within the rock mass blocks.

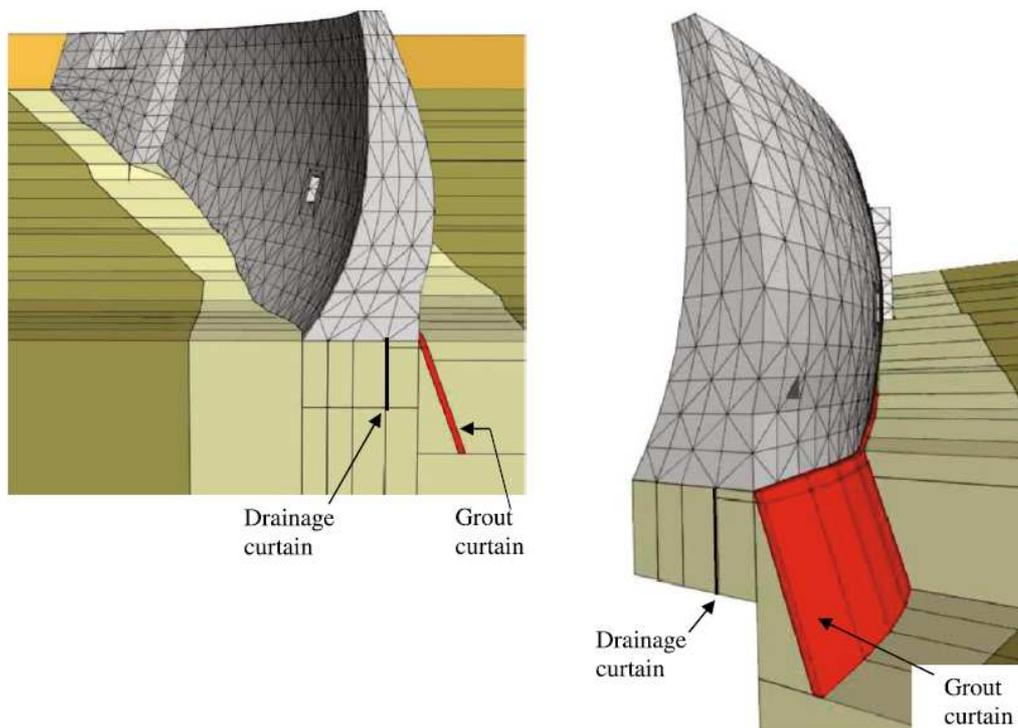


Figure 3. Global foundation model: cross section with simulated grout and drainage curtains (a) and detail showing the grout and drainage systems (b) (adapted from [6]).

It is assumed that dam concrete Young's modulus is 20 GPa and that the rock mass Young's modulus is 10 GPa where schist occurs and 5 GPa in the phyllite area. Regarding joint deformability, the same normal and shear stiffnesses are assumed in the simulated discontinuities ($k_n = 10 \text{ GPa/m}$ and $k_s = 5 \text{ GPa/m}$). Friction angles of 40° and 35° are assumed at the dam contraction joints and at the grout curtain/rock interface, respectively. In these discontinuities, it is assumed that both cohesion and tensile strength are zero. Regarding the foundation joint, various studies have presented strength parameters determined experimentally [7], but the results are widely scattered. In this study it is assumed that the foundation joint friction angle is 45° and that cohesion and tensile strength are 2 MPa.

The hydraulic model was developed taking into account field data and the results of several in situ tests which allowed the main seepage paths to be identified [6,8]. The grout curtain is modelled adjacent to the upstream edge, not underneath the dam itself, and the drainage system is simulated in a simplified way by a hypothetical continuous trench with the same depth as the drains. The existence of vertical fissures at the heel of the dam is simulated by a near-surface area of higher permeability upstream from the grout curtain, in the valley bottom and at the base of each slope. Horizontal layers of higher permeability between the above-mentioned near-surface area and the drainage curtain are assumed close to the concrete/rock mass interface to simulate the main seepage paths. In the foundation of some of the dam blocks located in the valley bottom, the permeability of the horizontal layers between the near-surface area of higher permeability and the drainage curtain was adjusted in order to obtain numerical discharges close to average discharges recorded with the

reservoir at the retention water level (152 m) and the water downstream from the dam-wall at an elevation of 85.6 m (reservoir and tailwater levels recorded on the 8th January 2010). The concrete/rock mass interface and the bottom and lateral boundaries are assumed to be impervious. A zero pressure is assumed at the drains' head, which corresponds, at the bottom of the valley, to a hydraulic head of around 61.0 m along the drainage boreholes.

The model has 2209 blocks (of which 30 are dam blocks) with 80491 nodal points and 11209 contact points, where interaction between blocks takes place. The average edge lengths of the tetrahedral finite elements of the dam foundation are: i) 4 m in the blocks surrounding the drainage curtain, ii) 8 m in the vicinity of the above-mentioned blocks, including the grout curtain area, iii) 12 m in the areas close to the dam in the upstream and downstream direction, and iv) 20 m in the remaining blocks, including the block at the base of the model. Dam blocks are divided into 442 finite elements of the second degree, with 6999 nodal points, and the foundation blocks into 143676 tetrahedral elements, with 73492 nodal points.

3.2 Sequence of analysis

The sequence of analysis included: i) calculation of in situ stresses due to the weight of the rock mass; ii) consideration of dam weight, and iii) application of hydrostatic loading on the upstream face of the dam and on the foundation discontinuities. Each one of these actions was kept constant during numerical analysis.

Regarding water pressures within the foundation, including uplift pressures in the foundation joint, analysis was carried out assuming firstly that the drainage system was operating properly and then, in a very unfavourable situation, that it was non-operational. Figure 4 shows the calculated uplift pressures in both situations. It should be mentioned that the model takes into account the loss of hydraulic head at the grout curtain area, which is modelled upstream from the dam, and thus the hydraulic head at the heel of the dam is lower than full reservoir head (96 m). The situation with non-operational drainage system is, in this particular case, highly unfavourable, as tailwater head is only assumed downstream from the dam-wall, more than 100 m away from the toe of the dam, at the valley bottom. Figure 4 shows that, in this case, near full reservoir head is calculated along the base of the dam.

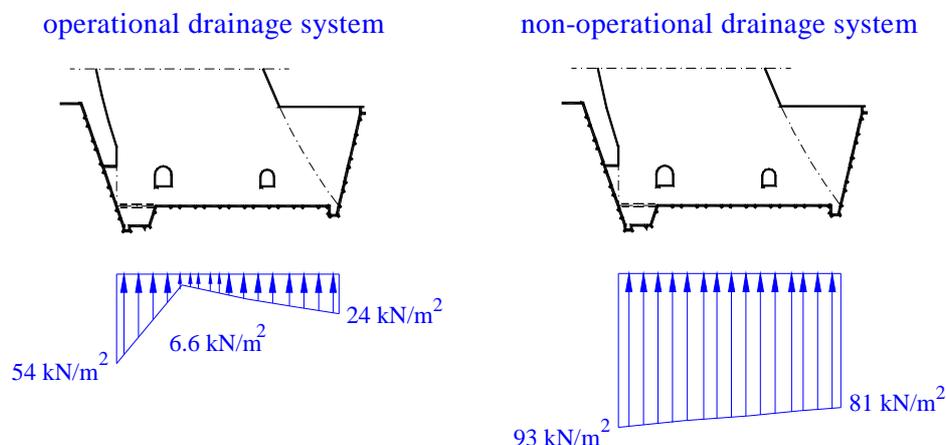


Figure 4. Calculated uplift pressures on the central cantilever.

Once the dam response to the considered loads had been calculated, analysis of dam foundation stability began, neglecting the contribution of both cohesion and tensile strength, but keeping the friction angle of 45° ($F = 1.0$). Afterwards, various increasing reduction factors of the friction angle were considered.

3.3 Validation of the numerical model

Comparison of recorded and numerical results (arch displacements, vertical displacement at foundation joint, stresses in the foundation rock mass due to increase in reservoir level and aperture of discontinuities through which water flows) with the reservoir at various levels showed that the geomechanical model developed is quite realistic, simulating the actual dam/foundation behaviour reasonably well. Concerning the hydraulic behaviour, comparison of both numerical and recorded discharges and water pressures showed that the model can provide mean water pressures and flow rates for each dam foundation block.

4 Stability of the dam/foundation interface

4.1 Analysis of displacements

Figures 5 and 6 show the field of displacements obtained on the downstream face of the dam for different F , assuming an operational and non-operational drainage system, respectively.

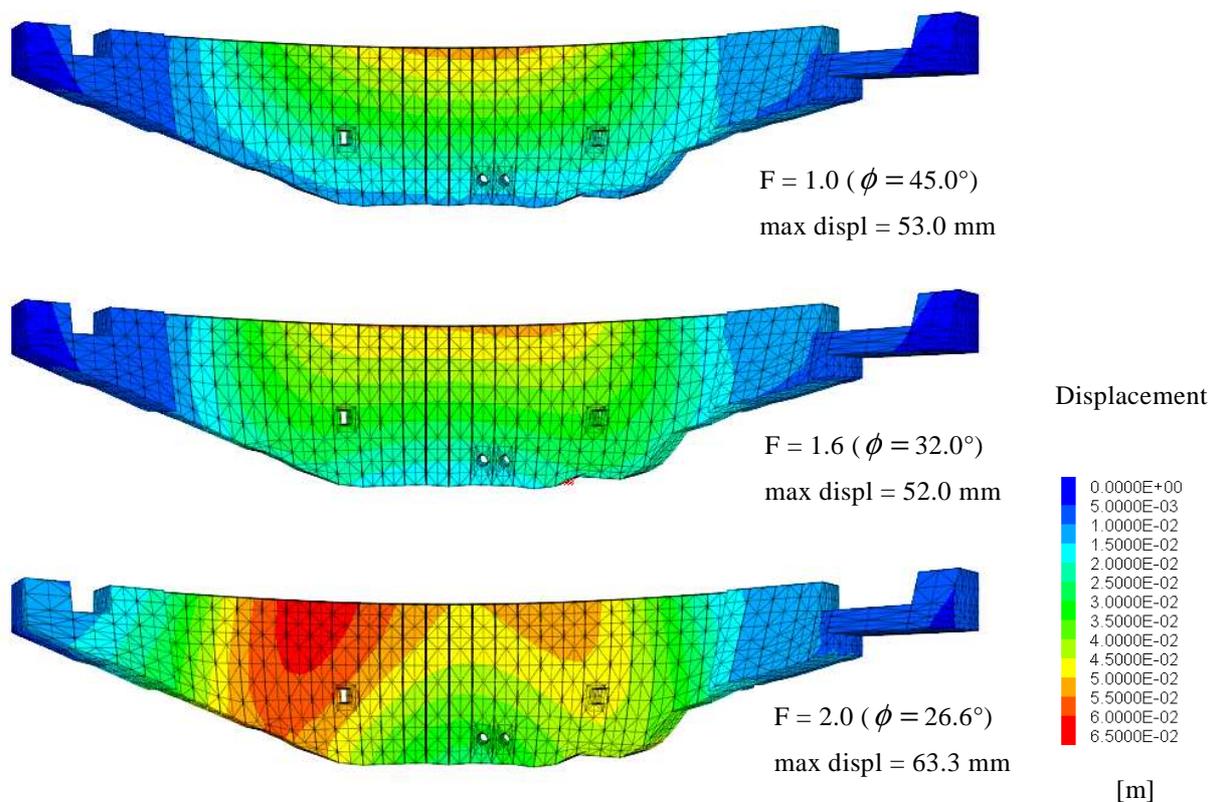


Figure 5. Displacements at the downstream face of the dam for different friction reduction factors ($F = 1.0, 1.6$ and 2.0), with an operational drainage system.

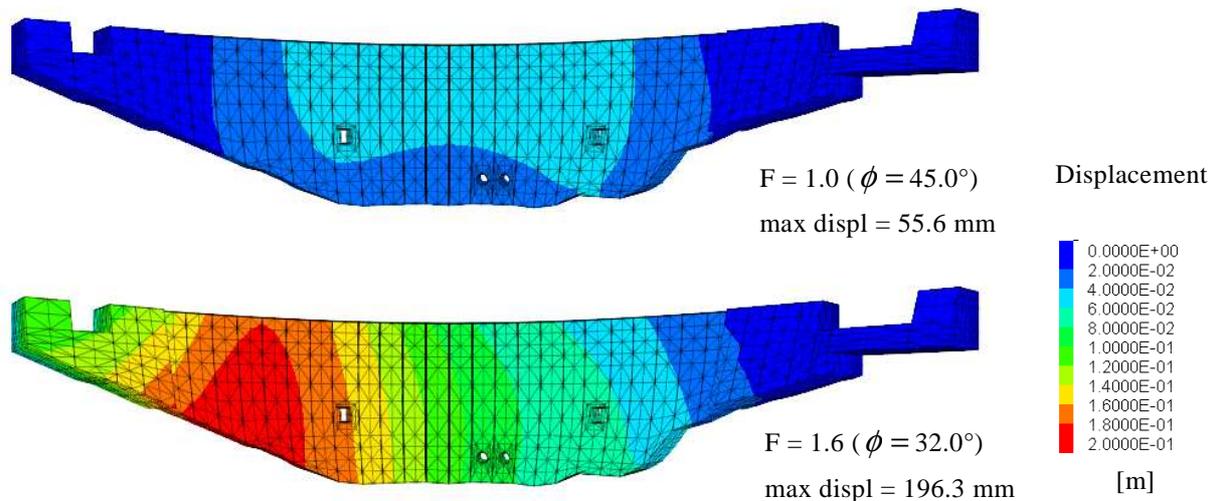


Figure 6. Displacements at the downstream face of the dam for different friction reduction factors ($F = 1.0$ and 1.6), with a non-operational drainage system.

The same failure mechanism is observed in both situations, with sliding of blocks from the right bank at the dam/foundation interface, although for the $F = 1.6$ the displacements when the drainage system is not operational are significantly higher. Dam movement is in the upstream-downstream direction. Analysis of displacement histories in various dam points during numerical analysis and analysis of finite element velocities lead to the conclusion that, with an operational drainage system, stress redistribution allows dam equilibrium to be reached again. With a non-operational drainage system the last stable situation is for $F = 1.6$.

Figure 7 shows the variation in dam displacements during the process of reduction of the tangent of the friction angle (these values include displacements due to the dead weight, hydrostatic pressure and uplift pressures). Different curves are shown representing the variation in displacements at the top and at the base of arch blocks. Figure analysis shows that, with an operational drainage system, dam displacements remain almost the same until $F = 1.4$ ($\phi = 35.5^\circ$). From this point, gradual increase in displacements is observed until $F = 1.9$ ($\phi = 27.8^\circ$), which becomes steeper for $F = 2.0$. With a non-operational drainage system, displacements have a moderate increase until $F = 1.3$, and a more visible increase for higher values of the reduction factor.

4.2 Comparison of the results with those obtained using the bi-linear uplift pressure distribution at the base of the dam

At the design stage, it is normal practice to assume full reservoir head at the heel of the dam and zero or tailwater head, if any, at the toe of the dam. At the drainage line the head is regularly assumed to be equal to between one half and one third of the head difference between the heel and toe of the dam. Thus, a bi-linear distribution of the uplift pressure along the base of the dam is assumed. Figure 8 shows the different uplift distributions along the base of the central cantilever obtained with a hydraulic analysis and using design assumptions.

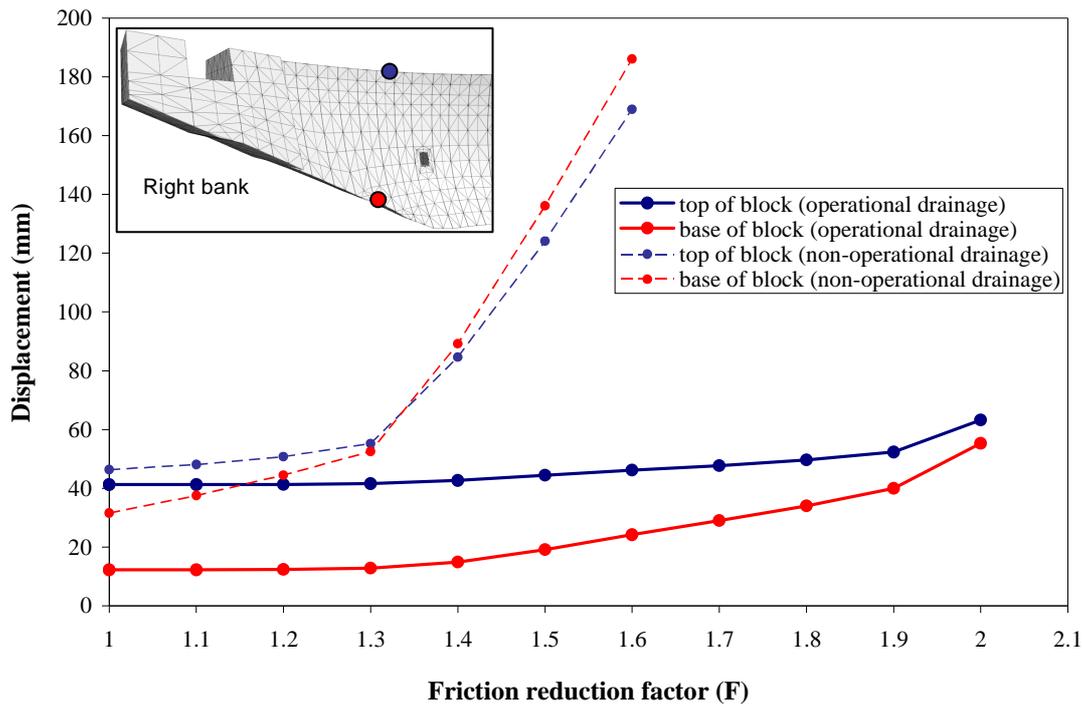


Figure 7. Variation in displacements at the top and at the base of two different blocks on the right bank, during the process of friction angle reduction, with and without drainage.

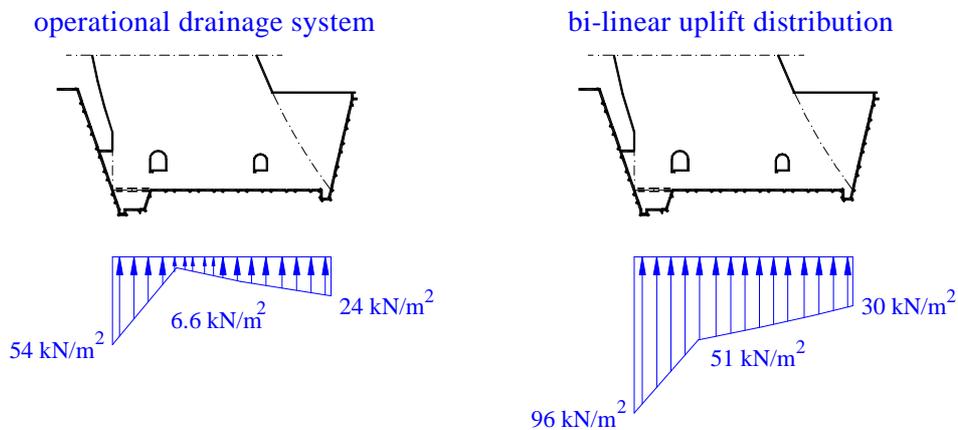


Figure 8. Calculated uplift pressures with an operational drainage system and bi-linear uplift distribution along the base of the central cantilever.

The variation in displacements at the two different dam points, during the process of friction angle reduction, with the different uplift distributions, is shown in Figure 9. With the bi-linear uplift distribution displacements at the base of the block remain almost unchanged until $F = 1.2$, increase until $F = 1.7$, and increase further after that. It is concluded that from $F = 1.7$ dam behaviour is quite different from that obtained with the calculated water pressures.

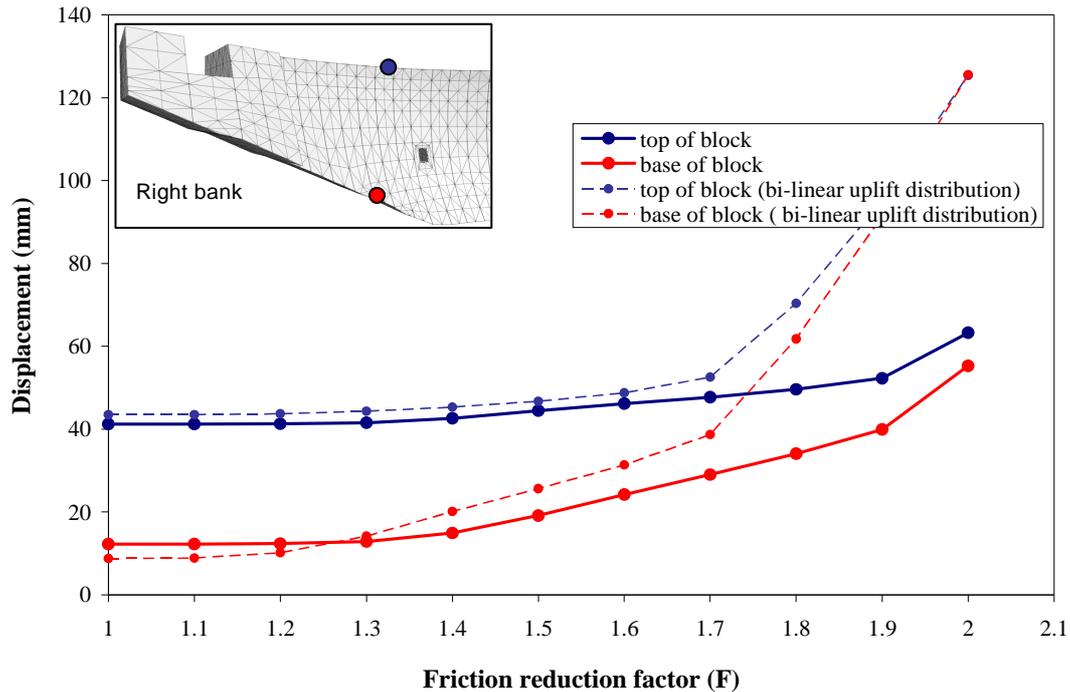


Figure 9. Variation in displacements at the top and at the base of two different blocks on the right bank, during the process of friction angle reduction, with different uplift distributions.

5 Conclusions

This paper presents a study of Alqueva dam using a numerical model to look at the possible foundation failure scenario of sliding along the dam/foundation interface. In this model, the dam/foundation interface, arch dam contraction joints and two hypothetical joints between the grout curtain and the rock mass were simulated. Water pressures within the rock mass were considered, in order to analyse shear displacement in terms of effective stresses, with the reservoir at the retention water level. Applied uplift pressures were either the result of a hydraulic analysis or those usually prescribed in design codes, assuming a bi-linear distribution to account for the relief drains. Dam safety was evaluated using a process of reduction of strength characteristics, with the aim of calculating the minimum safety factors that ensure stability.

For the assessment of the failure scenario along the foundation joint the contribution of both cohesion and tensile strength was neglected, as prescribed in current Portuguese Regulation for the safety of dams, and the tangent of the friction angle was divided by an increasing factor F up to the value of 2.0. Two different situations were analysed, in the first of which an efficient drainage system was assumed. In this case, the system is still stable for $F = 2.0$, however there is a substantial increase in the rate of displacements for $F = 1.9$, corresponding to a friction angle of 27.8° . In the second scenario, with no drainage system, there is a sudden increase in dam displacements after $F = 1.3$, corresponding to a friction angle of 37.6° . This situation is particularly penalizing for this dam, because of the large distance between the toe of the dam and the location where the downstream reservoir conditions are established.

The study presented here shows that the hydraulic analysis carried out provides a realistic water pressure pattern, as it takes into account the loss of hydraulic head at the grout curtain area and the

different hydraulic and geotechnical conditions at the base of each dam block. This may be particularly relevant in dams with complex hydraulic boundary conditions, for instance in dams with more than one grout or drainage curtain, with drainage galleries in the abutments or adjacent structures, like the powerhouse at the toe of Alqueva dam. Comparison between the results obtained using the calculated uplift pressures and those commonly used in concrete dam design (bi-linear uplift pressure distribution) led to the conclusion that they may be quite different.

Further work is underway in order to calculate safety factors using the procedure presented in this paper and a model which takes into account the main faults and sets of rock joints within the dam foundation, in addition to the discontinuities simulated in the model presented here. In this case, hydrostatic pressure is likely to have a great influence on slope instability mechanisms and on the safety factor, and thus the importance of carrying out hydraulic analysis will probably be even more evident.

Acknowledgements

Thanks are due to EDIA, Empresa de Desenvolvimento e Infra-Estruturas do Alqueva, SA for permission to publish data relative to Alqueva dam.

References

- [1] G. Barla, M. Bonini, and G. Cammarata, Stress and seepage analyses for a gravity dam on a jointed granitic rock mass, Proceedings of the First International UDEC/3DEC Symposium, Bochum, 29 September - 1 October 2004, pp. 263-268, 2004.
- [2] E.Á. Gimenes, and G. Fernández, Hydromechanical analysis of flow behaviour in concrete gravity dam foundations, Canadian Geotechnical Journal, **43**(3): 244-259, 2006.
- [3] J.V. Lemos, Modelling and failure analysis in rock engineering, Research Programme, LNEC, Lisboa, 1999.
- [4] J.V. Lemos and N. Antunes, Modelling of arch dam foundation failure scenarios – case studies of Baixo Sabor and Alto Ceira dams, Proceedings of 6th International Conference on Dam Engineering, Lisboa, Portugal, 15-17 February, LNEC, 2011.
- [5] Itasca, 3DEC – 3 Dimensional Distinct Element Code. Version 4.2. User's manual, Itasca Consulting Group, Minneapolis, 2006.
- [6] M.L.B. Farinha, J.V. Lemos and E. Maranha das Neves, Numerical Modelling of borehole water-inflow tests in the foundation of the Alqueva arch dam, Canadian Geotechnical Journal, **48**(1): 72-88, 2011.
- [7] European Club of ICOLD, Sliding safety of existing gravity dams – Final report, Report of the European Working Group, 2004.
- [8] M.L.B. Farinha and J.V. Lemos, Stress-dependent permeability in the foundation of Alqueva dam, Proceedings of 2nd International Conference on Long Term Behaviour of Dams, Graz, Austria, 12-13 October, 2009, pp. 125-130, 2009.